



970-586-0660  
www.milbatteries.com

We provide the military user and OEM a variety of NATO plugs, receptacles, and cable assemblies. This includes the common **MIL-SPEC** variants and newer innovative designs that are smaller, lighter, and less expensive.

*There's a full list of MIL-SPEC items with part numbers and NSNs on the last page.*

<b>Standard Size NATO Plugs MIL-SPEC</b>	
<b>Mil Description: CONNECTOR,PLUG,ELECTRICAL</b>	
<b>NSN</b>	<b>US Army P/N</b>
5935-00-567-0128	11682338 USA Manufactured
5935-01-369-0796	UK Manufactured version SBORD-102C
5935-99-802-2423	



### **Standard full size NATO plug, P.N 11682338.**

Inside view

Commonly used to make slave (jump) start cables.  
Diameter of cable entry is .78", sized for 2/0 wire.  
Weight is ~4.5 lbs. 8" long. 3.5" wide.

These NATO plugs are built to **Mil-Spec (MIL-PRF-62122-E & STANAG 4074)**. We work with multiple, US Military approved manufacturers, and as a result product color may vary slightly.

## Smaller version NATO slave plugs

(special order, minimum quantity may apply depending on inventory status)

Smaller, lighter NATO plugs for lower power applications. Not intended for vehicle jump-starting.

### Single wire entry, P/N MBS2600

100 amps continuous



### Dual wire entry, P/N MBS2700


200 amps continuous



---

## NATO Receptacle, P/N 11674728 (Military Description: CONNECTOR,RECEPTACLE,ELECTRICAL)

This is the most common version of the NATO power receptacle. It's used on most tactical vehicles, generators, and wide variety of other military equipment.

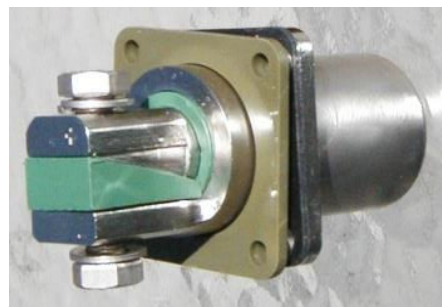

NSN (multiple NSN have been issued for this part over the years)	US Army P/N
5935-01-044-8382	11682345
5935-01-097-9974	11674728
5935-01-059-0117	11674728


These NATO receptacles are built to **Mil-Spec (MIL-PRF-62122-E & STANAG 4074)**. We work with multiple, US Military approved manufacturers. Product color may vary slightly.

## Smaller, lighter NATO plugs for low power applications:

The following plugs and cable assemblies are an excellent option for a wide variety of low power military applications. **Smaller! Lighter! Lower cost!**



The new **GEISLV-A** was designed for power requirements up to 150 amps. It provides a compact, flexible and economic solution. The modular design of the new GEISLV-A allows the user to customize the connector to their specific need using a variety of cable sizes and types.

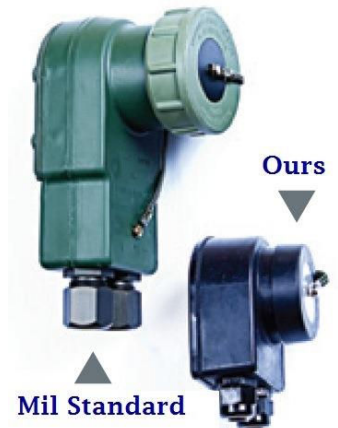

The Mini-Nato **GEISLV-SR** was created to provide user flexibility for slave connector needs. It will accept any cable gage up to 10 awg, and is rated for up to 35 amps. It is an excellent alternative to other bulkier and more costly connectors. Its simple assembly makes The GEISLV-SR an excellent option for prototyping, small manufacturing runs, or simply improvising in the field.



Back view





### **Smaller, lighter NATO plugs with integrated wire:**

The mini-NATO plug is over-molded on the wire providing a clean, reliable assembly.



Mini NATO slave connector on one end with integrated 2-conductor wire. Bare wire on other end.

#### **GEISLV-LC10:**

35 amps max. 10 ft X 10AWG

#### **GEISLV-LC14:**

20 amps max. 15 ft X 14 AWG

We can also build custom cable assemblies with any of our Mini-NATO plugs.

Please let us know what you require in terms of wire length, terminating connector, etc.

## NATO Slave/Jump Start Cables (Military description: CABLE ASSEMBLY,POWER,ELECTRICAL)

We offer two versions of NATO Slave Cables:

1. Mil-Spec version, built to the US Army Spec, MIL-PRF-62122(E)
2. Super-Flex version. Uses the same NATO plugs on the ends but with an upgraded 2/0 wire that is much more flexible. The two wires are bonded together eliminating the need for wire ties which cause snags and scratches when handling. It's easier to handle and store. Red & black wire is more visible.

**Mil-Spec version**



**Super-Flex version**



Length (feet)	P/N for US Military version	NSN	P/N for <b>Super-Flex</b> version
20	11682336-1	6150-01-022-6004	11682336-1/OM
50	11682336-2	6150-01-310-1829	11682336-2/OM
6	11682336-3	6150-01-390-7058	11682336-3/OM
12	11682336-4	6150-01-222-7943 & 6150-01-577-2785	11682336-4/OM
75	11682336-5		11682336-5/OM
35	11682336-6	6150-01-248-9555	11682336-6/OM

### NATO 2-pin adapter

P/N 11677570, NSN: 5935-00-322-8959

Allows current style NATO slave cables to be connected to older vehicles that have the 2-pin NATO receptacle.

This is a special order item. Minimum quantity may apply. Please contact us for current inventory status.





**Custom cable assemblies:**  
These are just a few examples. Contact us with your requirements.





(970) 586-0660  
[www.milbatteries.com](http://www.milbatteries.com)

**NATO Slave Cables \*\*\*built to the US Army Spec, MIL-PRF-62122(E) \*\*\***

TACOM P/N	DESCRIPTION	NSN	NIN
11682336-1	20 FOOT ASSEMBLY	6150-01-022-6004	10226004
<b>11682336-2</b>	<b>50 FOOT ASSEMBLY</b>	<b>6150-01-310-1829</b>	13101829
<b>11682336-3</b>	<b>6 FOOT ASSEMBLY</b>	<b>6150-01-390-7058</b>	13907058
11682336-4	12 FOOT ASSEMBLY	6150-01-222-7943 & 6150-01-577-2785	12227943
11682336-5	75 FOOT ASSEMBLY		
<b>11682336-6</b>	<b>35 FOOT ASSEMBLY</b>	<b>6150-01-248-9555</b>	12489555
11682337-1	20 FOOT ASSEMBLY	2590-00-398-6527	3986527
11682337-2	50 FOOT ASSEMBLY	2590-00-372-9193	3729193
11682337-3	6 FOOT ASSEMBLY		
11682337-4	12 FOOT ASSEMBLY	2590-01-222-7942	12227942
11682337-5	75 FOOT ASSEMBLY		
11682337-6	35 FOOT ASSEMBLY		

NATO slave cables listed here are built to US MIL-SPEC.

We also have more user friendly Super-Flex NATO slave cables available.

**NATO Slave Cable Kit (includes slave cable & 2 of the old style 2-pin adapters, 11677570)**

11682379-1	20 FOOT ASSEMBLY	2590-00-148-7961	1487961
11682379-2	50 FOOT ASSEMBLY	2590-00-363-7102	3637102
11682379-3	6 FOOT ASSEMBLY		
<b>11682379-4</b>	<b>12 FOOT ASSEMBLY</b>	<b>2590-01-222-7946</b>	12227946
11682379-5	75 FOOT ASSEMBLY		
11682379-6	35 FOOT ASSEMBLY	6150-01-245-2441	12452441

Need a NATO plug or cable for low power (no jump starting) applications? We have a variety of smaller, lighter, less expensive alternatives.

**NATO Slave Plugs**

11682338	Standard NATO slave plug	5935-00-567-0128
----------	--------------------------	------------------

Plug PN 11682668 & Receptacle PN 11674728 conform to

**NATO Receptacles**

11674728	Panel mount receptacle with dust cap	5935-01-097-9974
----------	--------------------------------------	------------------

This is the most common NATO Receptacle. It's mounted on a majority of US Mil vehicles, generators, etc.

12472733	Panel mount receptacle with dust cap & longer lead.	5935-01-474-3327
11682345	Panel mount receptacle NO dust cap	5935-01-044-8382

**NATO 2-Pin adapter**

11677570	2-pin adapter	5935-00-322-8959
----------	---------------	------------------